



THOROUGHCLEAN WATER BLASTERS

D10-35C

Portable Diesel Water Pressure Cleaner

YANMAR

The ThoroughClean D10 portable pressure cleaner range demands high pressure and/or flow in a rugged, tough and over-engineered machine that will outlast any other water blaster.



Thoroughclean Water Blasters
www.thoroughclean.com.au



Diesel Driven



Cold Water



Medium Usage

Distributed by:




1300 378 872

sales@trhc.com.au

www.trhc.com.au

12-14 Ashburn Road
Ipswich Qld 4304

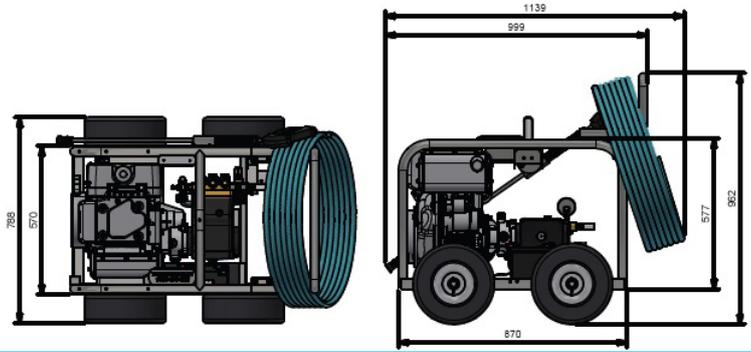

STANDARD EQUIPMENT

	TRHC2729B - Italian made dry gun.
	TRHC4413 - 900mm insulated stainless steel lance.
	TRHC0324 Stainless steel fan nozzle.
	Hose - 10m of 3/8" steel dual braided hose.
	TRHC3465 Hawk Pump

OPTIONAL ACCESSORIES

Accessories	p/n	
Extra + mt hose	p/n	TRHC7230
Chemical injector 8 - 12 lts per minute	p/n	TRHC5221+ TRHC4692
330 mm Stainless steel lance	p/n	TRHC3959
1500 mm Stainless steel lance	p/n	TRHC0080
Detergent nozzle	p/n	TRHC2718
Turbo nozzle 255 bar	p/n	TRHC5695
Galvanized Hose reel	p/n	TRHC1876



ANALYSIS - DESIGN
CONSTRUCTION - ACCESSORIES

DISCLAIMER: All images are a representation only and are not to scale. Although care has been taken to ensure the accuracy, completeness and reliability of the information provided, due to ongoing product development and improvements, products may vary from this data sheet. The user of the information agrees that the information is subject to change without notice.

Product Code	p/n	D10-35C
--------------	-----	---------

TECHNICAL DATA

Working Pressure	psi / bar	3500/241
Flow Rate	l/pm	15
Max Water Inlet Temp	°c / °f	63/154
Class (AS/NZS 4233.1:2013)	grade	A

INTENDED APPLICATION

Usage Frequency	hours	3 - 4
Category of Dirt / Debris	type	Medium

MOTOR FEATURES

Engine	type	Yanmar
Power	hp	10
Fuel Supply	type	Diesel
Fuel Capacity	litres	3.1
Low Oil Shutdown	y / n	n
Starting System	type	Recoil/elec

FEATURES

Drive Type	type	Gearbox
Pump	make	Hawk
Pump Speed	rpm	1450
Rating	Hz	50
By-Pass Valve	model	VBH
Orifice / Nozzle	size	15040

OTHER FEATURES

Operator Adjustable Pressure	y / n	N
Hose Reel Provision	y / n	Y
Frame Structure	type	Galvanised
Wheels	y / n	Flat free
Themoshield	63o	Y

DIMENSIONS & WEIGHT

Approx Weight	kg	146
Unit Dimensions - L x W x H	cm	99x78x96

WARRANTY(S)

Motor Warranty	year(s)	3
Pump Warranty	year(s)	1
Chasis Warranty	year(s)	5

**Derating (or de-rating or de-tuning) is the operation of a machine at less than its rated maximum power in order to prolong its life. The term is commonly applied to [electrical](#) and [electronic devices](#) and to [internal combustion engines](#)