



THOROUGHCLEAN

WATER BLASTERS

D24M-40C
D24M-50C
D24M-72C
Skid Diesel Water Pressure Cleaner

YANMAR

HAWK
INTERNATIONAL

The ThoroughClean D24M skid diesel pressure cleaner range demands high pressure and/or flow in a rugged, tough and over-engineered machine that will outlast any other water blaster.



Thoroughclean Water Blasters
www.thoroughclean.com.au



Diesel Driven



Cold Water



High Usage

Distributed by:




1300 378 872

sales@trhc.com.au

www.trhc.com.au

Available Australia Wide

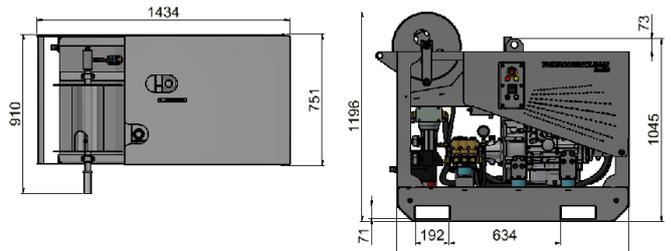

* Castor Wheels are optional extra. Allow 1450 mm height with wheels.

STANDARD EQUIPMENT



Product Code	p/n	D24M-40C	D24M-50C	D24M-72C
--------------	-----	----------	----------	----------

TECHNICAL DATA

Working Pressure	psi / bar	4000/275	5000/345	7200/496
Flow Rate	l/pm	18	21	17
Max Water Inlet Temp	°c / °f	63/154	63/154	63/154
Class (AS/NZS 4233.1:2013)	grade	A	B	B

INTENDED APPLICATION

Usage Frequency	hours	10 - 12	10 - 12	10 - 12
Category of Dirt / Debris	type	Heavy	Heavy	Heavy

MOTOR FEATURES

Engine	type	Yanmar	Yanmar	Yanmar
Power	hp	24	24	24
Fuel Supply	type	Diesel	Diesel	Diesel
Fuel Tank Capacity	litres	20	20	20
Low Oil Shutdown	y / n	Y	Y	Y
Starting System	type	Electric	Electric	Electric

OPTIONAL ACCESSORIES

Extra + mt hose
Industrial Castor wheels with brakes. Height will vary with wheels.
330 mm Stainless Steel Lance - Class A
1500 mm Stainless Steel Lance - Class A
Detergent nozzle



ANALYSIS - DESIGN
CONSTRUCTION - ACCESSORIES

DISCLAIMER: All images are a representation only and are not to scale. Although care has been taken to ensure the accuracy, completeness and reliability of the information provided, due to ongoing product development and improvements, products may vary from this data sheet. The user of the information agrees that the information is subject to change without notice.

FEATURES

Drive Type	type	Gear Box	Gear box	Gear box
Pump	make	Hawk	Hawk	Hawk
Pump Speed	rpm	1450	1450	1450
Rating	Hz	N/a	N/a	N/a
By-Pass Valve	model	VB80/280	VB60/600	VB60/600
Orifice / Nozzle	size	15040	15045	15045

OTHER FEATURES

Adjustable Pressure	y / n	Y	Y	Y
Hose Reel Provision	y / n	Y	Y	Y
Frame Structure	type	Galvanised	Galvanised	Galvanised
Wheels	y / n	Optional	Optional	Optional
Engine Cover	y	Aluminium	Aluminium	Aluminium

DIMENSIONS & WEIGHT

Approx Weight	kg	490 - 510	490 - 510	490-510
Unit Dimensions - L x W x H	cm	145x95x121*	145x95x121*	145x95x121*

WARRANTY(S)

Motor Warranty	year(s)	3	3	3
Pump Warranty	year(s)	1	1	1
Chasis Warranty	year(s)	5	5	5

Derating (or de-rating or de-tuning) is the operation of a machine at less than its rated maximum power in order to prolong its life. The term is commonly applied to **electrical and **electronic devices** and to **internal combustion engines**