



THOROUGHCLEAN

WATER BLASTERS

E3R-22C

Portable Electric Water Pressure Cleaner



The ThoroughClean E3R portable petrol pressure cleaner range demands high pressure and/or flow in a rugged, tough and over-engineered machine that will outlast any other water blaster



Thoroughclean Water Blasters
www.thoroughclean.com.au



Electric Driven



Cold Water



Light usage

Distributed by:




1300 378 872

sales@trhc.com.au

www.trhc.com.au

Brisbane, Melbourne, Sydney, Adelaide

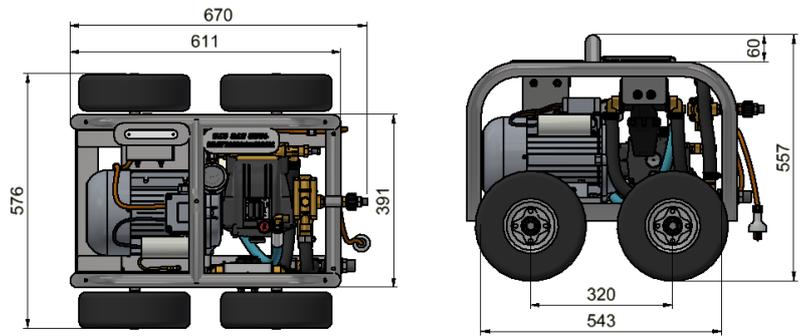

STANDARD EQUIPMENT

-  Italian made dry gun.
-  900mm insulated stainless steel lance.
-  Stainless steel fan nozzle.
-  10 mt 3/8" steel dual braided hose.
-  2200 PSI Triplex Hawk Pump

OPTIONAL ACCESSORIES

Extra + mt hose	p/n	TRHC7230
Chemical injector 8 - 12 lts per minute	p/n	TRHC5221+ TRHC4692
330 mm Stainless Steel Lance	p/n	TRHC3959
1200 mm Stainless Steel Lance	p/n	TRHC0080
Detergent nozzle	p/n	TRHC2718
Turbo nozzle 255 bar	p/n	TRHC4987



ANALYSIS - DESIGN
CONSTRUCTION - ACCESSORIES

DISCLAIMER: All images are a representation only and are not to scale. Although care has been taken to ensure the accuracy, completeness and reliability of the information provided, due to ongoing product development and improvements, products may vary from this data sheet. The user of the information agrees that the information is subject to change without notice.

Product Code	p/n	E3R-22C
--------------	-----	---------

TECHNICAL DATA

Working Pressure	psi / bar	1500/103
Flow Rate	l/pm	11
Max Water Inlet Temp	°c / °f	63/145
Class (AS/NZS 4233.1:2013)	grade	A

INTENDED APPLICATION

Usage Frequency	hours	2-3
Category of Dirt / Debris	type	Light

MOTOR FEATURES

Engine	type	Ravel
Power	hp	3
Fuel Supply	type	Electric
Capacity	Vlt/Amp	240/15
Lead Length	mts	10
Starting System	type	On/Off Button

FEATURES

Drive Type	type	Direct
Pump	make	Hawk
Pump Speed	rpm	1450
Rating	Hz	50
By-Pass Valve	model	K7-1
Orifice / Nozzle	size	15050

OTHER FEATURES

Frame Mount Type	type	Solid
Hose Reel Provision	y / n	N
Frame Structure	type	Galvanised
Wheels	y / n	Flat free
Themoshield	63o	Y

DIMENSIONS & WEIGHT

Approx Weight	kg	~58
Unit Dimensions - L x W x H	cm	54x57x55

WARRANTY(S)

Motor Warranty	year(s)	3
Pump Warranty	year(s)	1
Chasis Warranty	year(s)	5

**Derating (or de-rating or de-tuning) is the operation of a machine at less than its rated maximum power in order to prolong its life. The term is commonly applied to [electrical and electronic devices](#) and to [internal combustion engines](#)
SP-E3R-22C-TRHC Nov- 2022