

THOROUGHCLEAN

WATER BLASTERS

E15R-43C


PRESSURE CLEANER

Electric Driven - 15HP - RENTAL SPEC - 4350 PSI MPP - Cold Water

4350 PSI

Max Pump Pressure
3400 PSI
Setup Pressure

11kW Motor

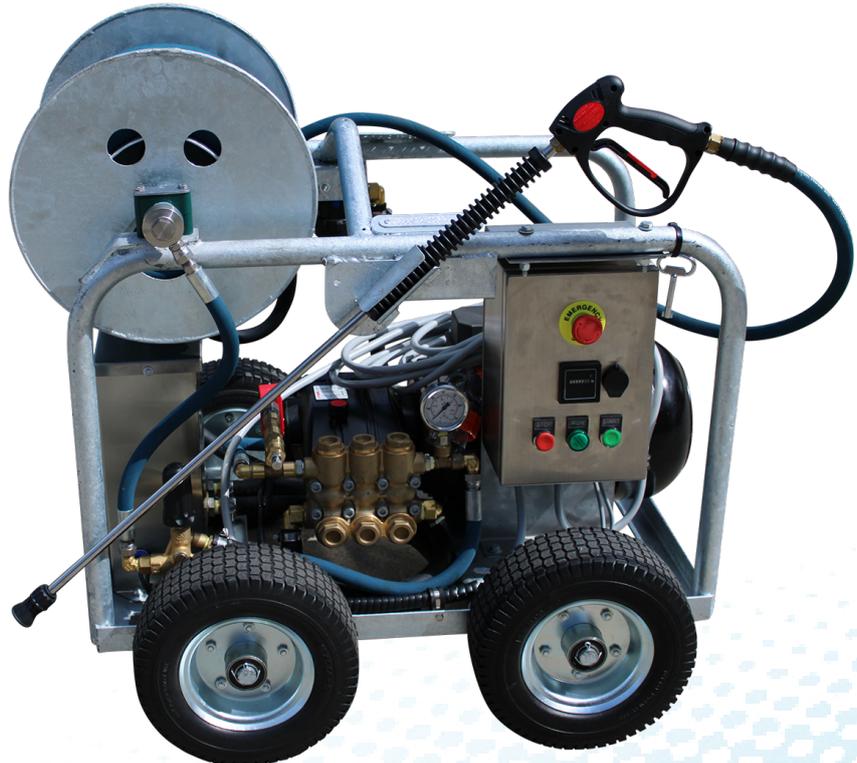

Heavy Duty - ELECTRIC - Cold Water - 4350 PSI, 18LPM

Heavy Duty Water Blasters - Portable, Skid, Trailer & Wash Bay Units



PH 1300 378 872
WEB www.trhc.com.au
EMAIL sales@trhc.com.au

15HP Heavy Duty, Rental Spec Portable ELECTRIC PRESSURE CLEANER

The ideal portable water blaster that demands high pressure and/or flow in a rugged, tough and over-engineered machine, that will outlast any other water blaster!

MAX PUMP PSI 4350 PSI
STANDARD SETUP PSI 3400 PSI
FLOW/MINUTE 18 LPM

POWERED BY 15 HP Electric Motor
SIZE 95 x 85 x 95 cm
WEIGHT ~195 kg

POWER SOURCE

- Italian heavy duty 15HP (11kW) electric motor - class 'F' wound.
- 415 volt, three-phase.
- DOL motor starter, in stainless steel control box.
- Timed shutdown.
- Wired to shut down on low tank water level - preventing pump from cavitating and running dry.
- 10m lead with 32 Amp Plug

DELIVERY

- Heavy duty glycerine-filled pressure gauge rated to 10,000 PSI.
- Heavy duty galvanized hose reel.

30m R2 thick wall 3/8" HP Hose:

- Rated to 5000 PSI.
- 4x burst rating.
- Hose end sleeved for operator protection.

Italian made dry gun with:

- 900mm insulated stainless steel lance.
- Stainless steel fan nozzle.

PUMP

- **HAWK** XLT1830 Triplex Pump rated at 4350 PSI max @ 18 LPM.
- The pump is de-rated** to 3400 PSI to prolong pump life.
- Ceramic sleeved, stainless steel plunger rods and brass pump head.
- Low speed pump at 1450 RPM.

FRAME

- Fully hot dipped galvanised steel frame.
- Extra-large 'flat free' wheels for easy rolling over uneven surfaces.

BY-PASS VALVE

- Pulsar Zero soft acting low to high PSI by-pass valve. Zero PSI stored downstream when in by-pass.
- No pressure stored in high pressure line when machine is turned off.

SUPPLY

- Water supply is via an over-sized industrial water filter to protect the pump from water line debris.
- The pump is protected by break tank with automatic low water shutdown.
- Pneumatic accumulator to prevent pressure spikes & water hammering.



DISCLAIMER All images are a representation only and are not to scale. Although care has been taken to ensure the accuracy, completeness and reliability of the information provided, due to ongoing product development and improvements, products may vary from this data sheet. The user of the information agrees that the information is subject to change without notice.

ANALYSIS - DESIGN - CONSTRUCTION - ACCESSORIES

**Derating (or de-rating or de-tuning) is the operation of a machine at less than its rated maximum power in order to prolong its life. The term is commonly applied to electrical and electronic devices and to internal combustion engines